

YAMAHA VENTURE ROYAL STAR  
**SUPER BRIGHT BRAKE LIGHT #SBRKL-YRS**  
**(L.E.D. Brake Light Installation Instructions)**

1. Remove the plastic plugs and peel back the rubber covers located on the rear of the trunk support rack.
2. Install the screws provided into the short leg of the two (2) black metal “L” brackets, then into the exposed hole in the rack using the washers and nuts provided. The offset of the brackets should go to the outside of left and right of the motorcycle. Snug the screws then hold the light assembly in place to check for spacing and alignment with the mounting holes. Tighten the screws securely while holding the brackets in place with pliers.
3. Install the light onto the brackets. Using a side cutting pliers or sharp knife trim the rubber covers to go around the light brackets and press them back into place.
4. Route the wire along with the other wires forward and under the passengers seat to the taillight wire plug located where the rider and passengers seats meet. This will be a white plastic plug. The blue wire is the taillight, the yellow wire is the brake light and the black is the ground. Connect the wires as stated in the general installation instructions above.

**RIVCO Products, Inc.**

440 S Pine Street    Burlington, WI 53105  
262.763.8222        rivcoproducts.com


YAMAHA VENTURE ROYAL STAR  
**SUPER BRIGHT BRAKE LIGHT #SBRKL-YRS**  
**(L.E.D. Brake Light Installation Instructions)**

1. Remove the plastic plugs and peel back the rubber covers located on the rear of the trunk support rack.
2. Install the screws provided into the short leg of the two (2) black metal “L” brackets, then into the exposed hole in the rack using the washers and nuts provided. The offset of the brackets should go to the outside of left and right of the motorcycle. Snug the screws then hold the light assembly in place to check for spacing and alignment with the mounting holes. Tighten the screws securely while holding the brackets in place with pliers.
3. Install the light onto the brackets. Using a side cutting pliers or sharp knife trim the rubber covers to go around the light brackets and press them back into place.
4. Route the wire along with the other wires forward and under the passengers seat to the taillight wire plug located where the rider and passengers seats meet. This will be a white plastic plug. The blue wire is the taillight, the yellow wire is the brake light and the black is the ground. Connect the wires as stated in the general installation instructions above.

**RIVCO Products, Inc.**


440 S Pine Street    Burlington, WI 53105  
262.763.8222        rivcoproducts.com

# SBRLK WIRING DIAGRAM

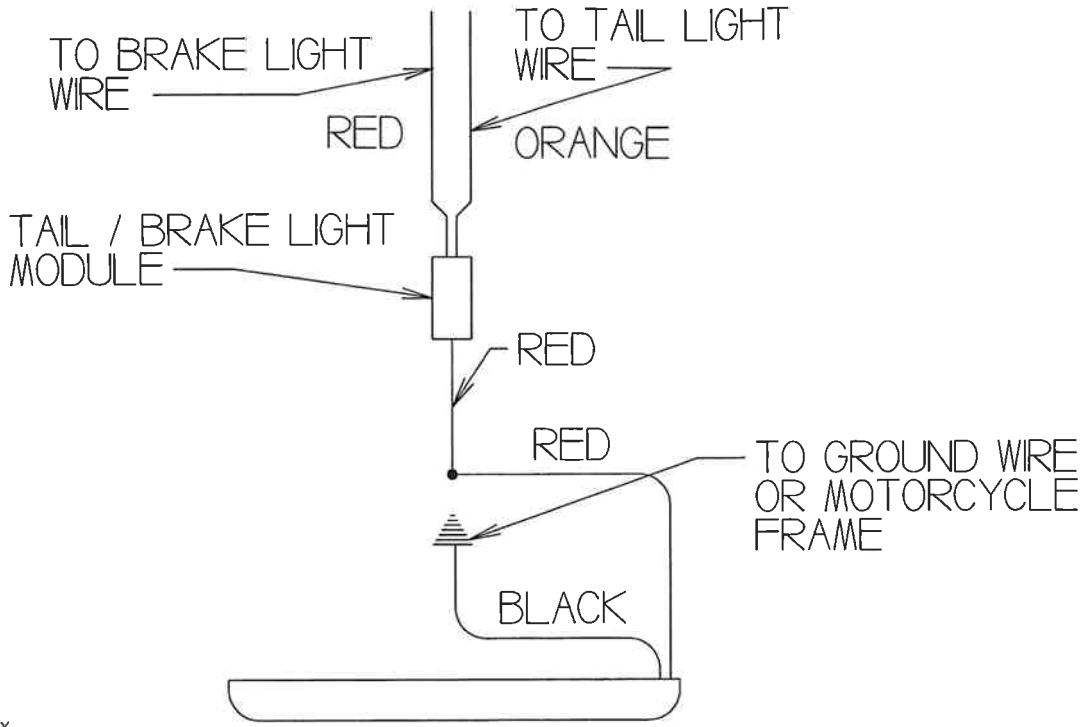

inch

# SBRLK WIRING DIAGRAM

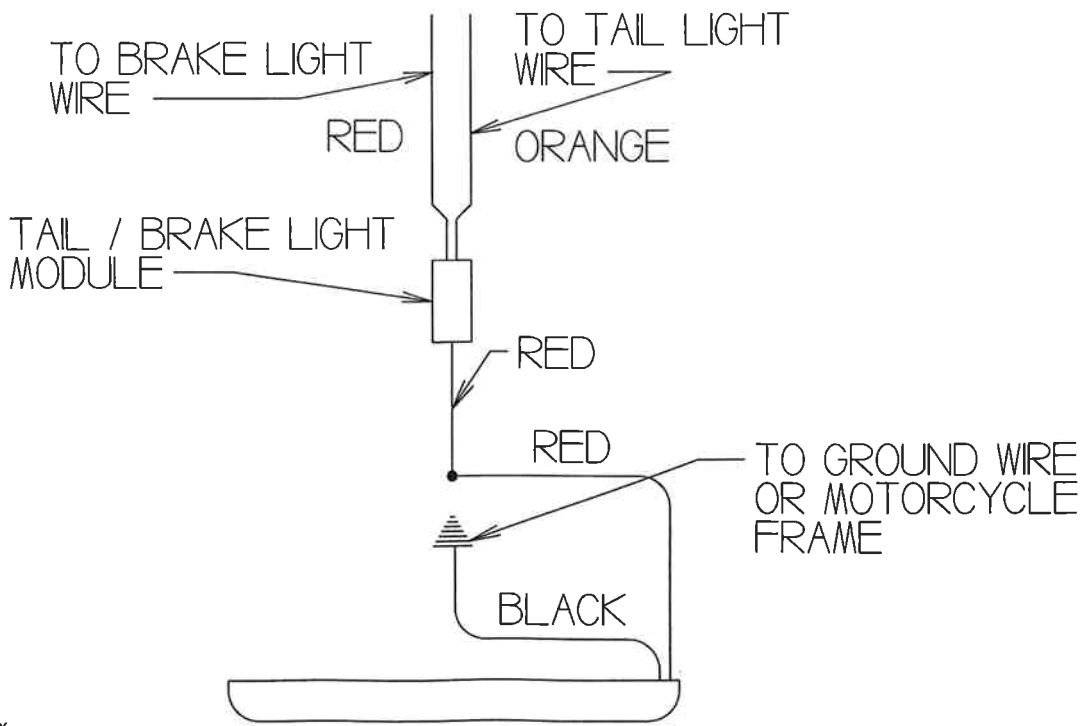

inch